

ZPARK GATEWAY

Product sheet



A central unit that connects the Zpark system via the building's fiber network or LTE. The Gateway is built for high scalability and can control individual units over long distances. Multiple vehicles can charge simultaneously without exceeding the building's electrical capacity. Each gateway supports over-the-air updates (OTA), runs the latest software, and meets the latest industry standards.



Seamless integration

Each Gateway is upgradable over-the-air (OTA), ensuring that each installation always has the latest software and meets the latest standards on the market.



High scalability


The Gateway is a complete, flexible and scalable system that allows maximum use of the power grid connection with a wide range of chargers.



Full control over property

Integrate energy storage, solar cells, submeters, etc. so that everything is controlled by the Zpark Gateway, enabling full control over the property's energy infrastructure.

Antenna Connection

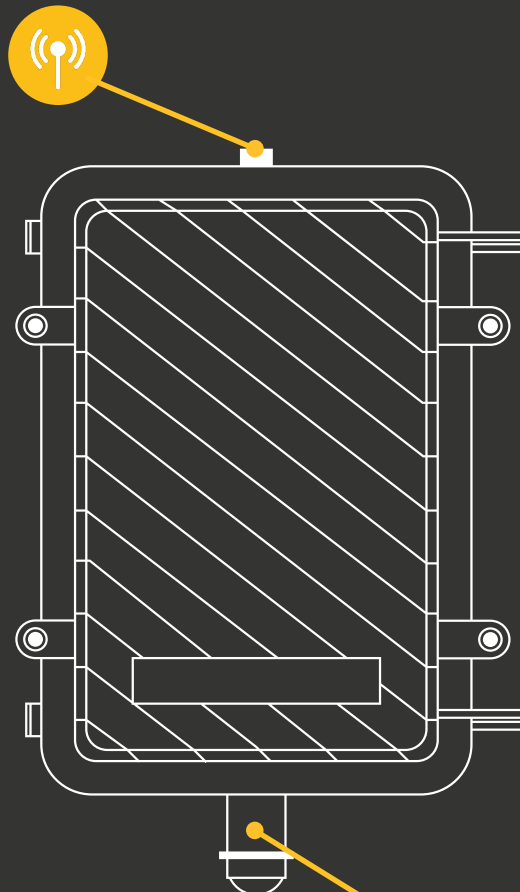

Cable Connection

Product specs

Dimensions	H: 1235mm, W: 150mm, L: 80mm
Standard	Lora.
Device Cable Connection	Ethernet.
Radio Antenna Connection	Communication to devices.
Mounting	Wall or pole. High up (as high as possible). Good connectivity even through buildings.
Protection Class	From IP54. From IK08.

Do you wish to get in contact with us?

If you are interested to learn more about our products or want to get in contact with us, the easiest way is to scan the QR-code.

Fill in the form that shows up and we will get back to you as soon as possible.

You can also email us directly at **info@zpark.se**



If you are unable to scan the QR-code, **[click here](#)**

